

## OUTDOOR PROTECTION PRODUCTS

MATERIELS DE PROTECTION DE PLEIN AIR

### FLAME RETARDANT TARPAULIN BACHES IGNIFUGE

- Flame retardant tarpaulins are designed and manufactured in compliance with European norms.
- It has coated with chemicals, which makes these flame retardant.
- It is mainly used in the welding application.
- Easy to set up & can be assembled quickly.
- It provides a closed work environment and protects workers from harsh weather conditions.
- Standard as per NFPA 701



Product Code	Description	Size	Colours
36FRT66-Green	Tarpaulin G-Tarp, PVC Fire retardant	6mX6m	Green
36FRT66-Orange	Tarpaulin G-Tarp, PVC Fire retardant	6mX6m	Orange
36PVCFRT-30X30	Tarpaulin G-Tarp, PVC Fire retardant	30FTX30FT	Orange
36PVCFRT6X10-ORG	Tarpaulin G-Tarp, PVC Fire retardant	6mX10m	Orange



### WELDING UMBRELLA (HEAVY DUTY) PARAPLUIE DE SOUDAGE (ROBUSTE)

- Welding umbrella is made of opaque canvas material.
- It is used mainly for the welders protection against wind, rain and sun.
- Compact and easy to carry and use.



Product Code	Diameters (cm)	Description	Colours
82UMBRELLA	220	Welding Umbrella-Heavy Duty	Green


### WELDING CURTAINS AND SCREENS

RIDEAUX ET ÉCRANS DE SOUDAGE

Welding Curtains and Screens are designed to protect against hazards from work area during welding process. Widely used to enclosed workstations, welding job sites and welding robotic cells. It can be used during operations like grinding, welding and cutting. It's a simple and versatile way to increase workplace safety. On request, even we can provide, welding screen ie, welding curtain with metal frame.

Features:

- Good visibility (with a high grade of transparency), only allow visible light through, filtering out harmful ultraviolet radiation.
- No harm to the welders' eyes when they survey welding operation situation.
- Stops all UV radiation and blue light.
- Durable, high strength and tear resistant, it is recommended for plasma cutting or welding of high-brightness application.
- Prevent spreading of smoke, sparks, debris and dust during the welding operation.
- Standard as per EN 1598

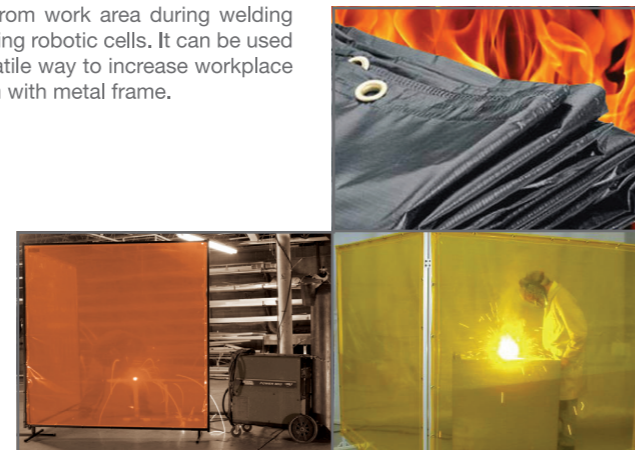

Product Code	Size/Description	Material	Thickness (mm)	Colours
36WC-1.8M	Welding Curtain 1.8 x 1.8m without stand	Transparent dark coloured vinyl	0.35	Golden Brown & Green
36WC-1.8MX1.8M	Welding Screen 1.8 x 1.8m with stand	Transparent dark coloured vinyl	0.35	Golden Brown & Green
36WC-1.8MX2.4M	Welding Curtain 1.8 x 2.4m without stand	Transparent dark coloured vinyl	0.35	Golden Brown & Green
36WC-2.4M	Welding Screen 1.8 x 2.4m with stand	Transparent dark coloured vinyl	0.35	Golden Brown & Green

# GEOTE X

RÉSISTANT À LA CHALEUR  
**TISSUS**  
HEAT RESISTANT  
**FABRICS**

SOUDURE  
**TOILES**  
WELDING  
**BLANKETS**

IGNIFUGE-RETARDATEUR DE FLAMME  
**BACHES**  
FLAME RETARDANT  
**TARPAULINS**

Edition  
**2016-17**



## FIRE BLANKETS


TOILES ANTI FEU

### STANDARD TEMPERATURE FIRE BLANKETS 550°C-700°C TOILES ANTI FEU A TEMPERATURE STANDARD 550° C - 700° C


E Glass Fibre Glass is the most common types of glass fiber used in fibreglass. This is commonly used in industrial, marine and aerospace applications. It provides an excellent balance between cost and performance. Suitable for all Fabrication and Welding applications.

Features:

- High strength and stiffness.
- Non flammable, Relatively low density.
- Heat and chemical resistant.
- Relatively intense to moisture.
- Able to maintain its strength and properties over a wide range of conditions.

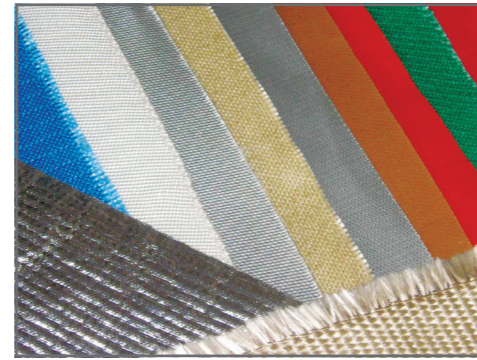

Product code	Size/Description	Temp (°C)	Thickness (mm)	Weight (gsm)	Colours
36FBWGEO-3732-N	1mtr x 50mtr/roll Fire Blanket 3732 Geotex 043	550	0.43	430	White
36FBWGEO-3800-N	1mtr x 50mtr/roll Fire Blanket 3800 Geotex 1	550	1.00	900	Brown/White
36FBWGEO-7628-N	1mtr x 50mtr/roll Fire Blanket 7628 Geotex 020	550	0.20	200	White
36FBWGEO-HT3784-0.8-N	1mtr x 50mtr/roll Fire Blanket 3784 Geotex 080	550	0.80	880	Brown/White
36FBWGEO-HT3788-1.7-N	1mtr x 50mtr/roll Fire Blanket 3788 Geotex 170	550	1.70	1700	Brown
36FBGEO-0.55-ADH-N	1mtr x 50mtr/roll Fire Blanket Adhesive coated Geotex 055	700	0.55	550	Brown/White

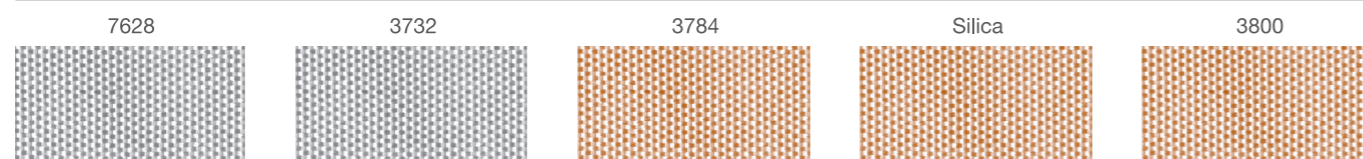

Fibreglass fabrics finishing style	Service Temp (°C)	Features	Image
Neoprene coated with fibreglass fabric	550	Abrasion resistant, allergan resistant	
Acrylic coated with fibreglass fabric	550	Abrasion resistant, anti-adhesive allergan resistant, easy to cuts	
Polyurethane coated with fibreglass fabric	550	Abrasion resistant, waterproof allergan resistant, easy to cuts	

## CUT FIRE BLANKET

TOILE COUPE FEU

### FIRE BLANKET (LIFESAVING) TOILE ANTI-FEU (DE SAUVETAGE)

- Fire Blankets are made of E-Glass fibreglass fabric. These blankets are specially treated in order to gain a better fireproof performance, flame and tear resistant.
- It protects against fire, intense heat and burn, shattered glass and sharp metal edges. It helps us to escape safely in the event of fire.
- It can quickly extinguish a small fire or apparel engulfed in flames.



Product code	Description/Size	Service Temp (°C)	Fabric thickness (mm)	Fabric weight (gsm)	Certification	Colour
36FBC-1.2M	Cut Fire Blanket 1.2x1.2m in PVC box	550	0.43	430	CE BSEN 1869:1997	White
36FBC-1.8M	Cut Fire Blanket 1.8x1.8m in PVC box	550	0.43	430	CE BSEN 1869:1997	White
36FBC-2.4M	Cut Fire Blanket 2.4x2.4m in PVC box	550	0.43	430	CE BSEN 1869:1997	White

## HIGH TEMPERATURE FIRE BLANKETS-800°C/1100°C

### TOILE ANTI-FEU A HAUTE TEMPERATURE - 800° C/1100° C

- Fibreglass products with a high SiO<sub>2</sub> content 98% (Silica materials) are excellent high temperature insulators. It can be used over long periods without losing its properties without melting and vaporising at temperatures.
- It set the standard for flexibility and minimum lineal shrinkage under high heat conditions.
- Durability is further enhanced with hydrocarbon coating which provides high abrasion resistance and tensile strength.

Application:

- Used for heat preservation and thermal insulation.
- Welding /cutting, molten metal splash protection.
- Heat and flame shielding, stress relief.
- Hose and cable protection.



Product code	Size/Description	Temp (°C)	Thickness (mm)	Weight (gsm)	Colours
36FBWGEO-SILICA140-N	0.914 X 50mtr/roll Silica Fire Blanket GEOTEX Silica	1200	1.40	1400	Brown
36FBWGEO-SILICA84-N	1mtr X 50mtr /roll Silica Fire Blanket GEOTEX Silica	1200	0.60	600	Brown

Other products available on request


Fibreglass fabrics finishing style	Service Temp (°C)	Features	Image
Silicon Adhesive coated with Fibreglass Fabric	700	Abrasion resistant and flame retardant, high temperature resistant and heavy welding.	
Silicon Graphite coated with Fibreglass Fabric	750	Abrasion resistant and flame retardant, high temperature resistant and heavy welding.	
Vermiculite coated with Fibreglass Fabric	900	Abrasion resistant, and flame retardant (For heavy welding).	
Carbon coated with Fibreglass Fabric	1000	Acid & Alkali resistant, Oil resistant and Flame resistant.	
Vermiculite coated with Fibreglass Fabric	1100	Abrasion resistant, and Flame retardant (For heavy welding).	

### MICA COATED FIRE BLANKET - 2000°C TOILES ANTI-FEU MICA ENDUITS - 2000° C

Material: New fibreglass fabric with mica compound coating  
Instant impact temperature: 2000°C

Characteristics:

- With special new Fire Mica Compound coating, it can be effective to withstand bumb 2000°C welding slag.
- Withstands high temperature slag and spark, good choice for hull task.
- Available in black colour.
- Standard as per EN1869.

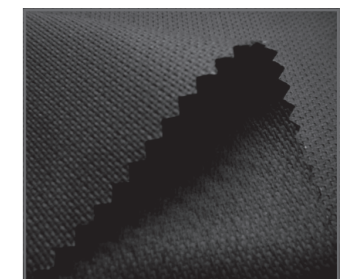

Type	Item No.	Coating weight (gsm)	Total weight (gsm)
Mica coated with fibreglass fabric	EWB-MCC-0214	1598	2298